HW40K

Mobile Self-Contained Hand Washing Station

Self-contained, 114 liter (30 US Gallon) capacity hand washing station provides a reliable way for personnel to ensure they are able to manage an effective hygiene regime, whatever the location. Featuring a soap and paper towel dispenser, the hand washing station delivers a controlled flow of water to perform approximately 150 hand washes* from a full unit.


- Stainless-steel frame and large pneumatic tires aid portability
- Hands-free foot activation for ease of use
- Simple to fill with a standard garden hose
- Can act as a supplement to permanent installations
- Suitable for indoor or outdoor use




opecinication is		
MATERIALS OF CONSTRUCTION		
PIPEWORK & FITTINGS	Stainless-steel	
OPERATING VALVE	Brass self-closing valve	
NOZZLE	Single aerated PVC nozzle	
STANDARD FINISH	Powder coated grey with white and blue stripes	
SERVICES		
CAPACITY	114 liters (30 US Gallons)	
DESIGN OPERATING PRESSURE	2 to 6 Bar (29 to 87 PSI)	
WATER INLET	¹ / ₂ inch quick connect stainless-steel coupling	
DRAIN	1 ¹ / ₂ inch PVC drain to floor	
FLOW RATE	2 liters per minute at 1.2 Bar	
HAND WASHING CYCLES	~150 washes per full tank*	
ENVIRONMENTAL OPERATING TEMPERATURES		
MINIMUM OPERATING TEMPERATURE	5C (41F)	
MAXIMUM OPERATING TEMPERATURE	35C (95F)	
OPERATION		
HANDWASH ACTIVATION	Push foot treadle operation with automatic shut off	
DIMENSIONS & WEIGHT		
DIMENSIONS (WxDxH)	839mm (33in) x 1254mm (44.4in) x 1752mm (69in)	
WEIGHT	79.8kg (176lb)	

*Based on the user washing for 20 seconds, with water flow in operation to wet and rinse hands only



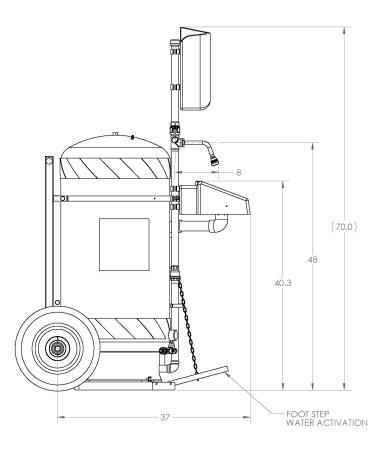

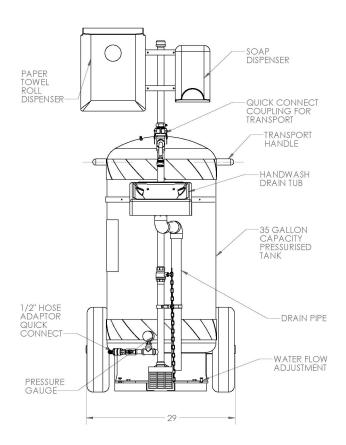



Hughes North America Inc. 457 Campbell Street, Sarnia, Ontario N7T 2J1, Canada. Email: info@hughes-safety.com

Tel: +1 (866) 312 1652

Registered No. 0939240. VAT Registration No. 918 5005 32. Hughes Safety Showers Ltd is a Justrite Group Company.