



SmartScope® Quest 800

- **Accurate video metrology** – TeleStar® telecentric 10:1 zoom optics for the highest level of optical performance
- **Multisensor versatility** – Optional touch probe, off-axis DRS™ laser, on-axis TeleStar TTL interferometric laser, micro-probes, SP25 continuous contact scanning probe, and PH10 motorized probe head
- **State-of-the-art software** – Powerful ZONE3® metrology software, and other productivity and offline software applications, to suit your requirements

Large Volume Multisensor Dimensional Measuring System


Axis	Travel (mm)
X axis	790
Y axis	815
Z axis	300
Extended Z (opt)	400



SmartScope® Quest 800



ZONE3® Metrology Software represents a totally new way of working with multisensor measurement systems, providing faster, easier, and more productive measurements.

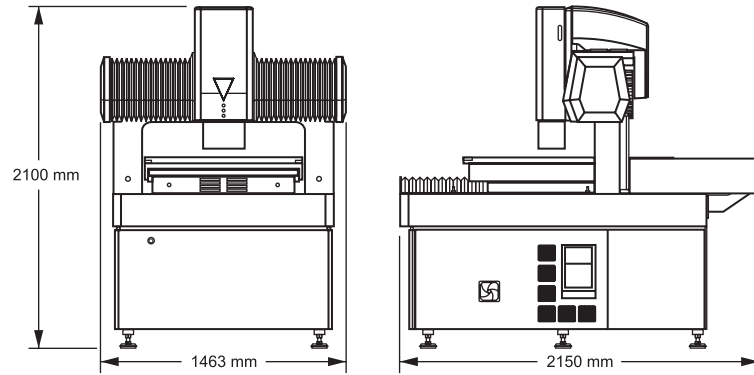

System Weight: 2575 kg
Shipping Weight: 2675 kg

	Standard	Optional
XYZ Travel	790 mm x 815 mm x 300 mm	Extended Z axis, 400 mm
XYZ Scale Resolution	0.1 µm	0.05 µm
Drive System	DC servo with 4-axis control (X,Y,Z, zoom) with multifunction handheld controller	XY liquid cooled linear motor drives
Worktable	Hardcoat anodized, with fixture holes, removable stage glass, 75 kg recommended max payload	
Rotary Axis		Miniature Servo Rotary (MSR), MicroTheta Rotary (MTR), Heavy Duty Rotary (HDR), High Precision Rotary (HPR), Dual Rotary (requires optional 400 mm Z axis)
Optics*	10:1 AccuCentric® TeleStar® auto-compensating, telecentric zoom, motorized; mag range 0.8x-8x, with up to 10 calibrated positions; 1.0x replacement lens	Focus Grid Projector: LED source Laser Pointer: Not available with optional TTL laser Replacement Lenses: 0.45x, 0.5x, 2.0x, 4.0x Laser Lenses: 0.45x, 0.5x, 2.0x, 4.0x
FOV Range	8.1 mm x 6.1 mm (low zoom) to 0.81 mm x 0.61 mm (high zoom)	14.6 mm x 11.0 mm (0.45x lens), to 0.20 mm x 0.15 mm (4.0x lens)
Working Distance	65 mm	Up to 200 mm (0.45x lens)
Illumination	Patented† servo-driven high performance monochromatic substage profile, LED coaxial TTL surface, 8 sector / 6 ring SmartRing™ LED	
Camera	High resolution, black & white digital metrology camera	
Image Processing	256 level grayscale processing with 10:1 subpixel resolution	
Sensor Options		Tactile: TP20 or TP200 Touch Probe, SP25 Scanning Probe, Feather Probe™, PH10 motorized probe head Non-Contact: Patented†† on-axis TeleStar Plus Interferometric TTL laser, DRS Laser, Rainbow Probe™
Controller	Windows® based, with up-to-date processor and on board networking/communication ports	
Controller Accessory Package	24" flat panel LCD monitor, keyboard, 3-button mouse	24" flat panel LCD monitor for dual monitor display
Software	<ul style="list-style-type: none"> • ZONE3 Express metrology software • QVI Portal 	Metrology software: ZONE3 Prime, ZONE3 Pro Productivity software: MeasureFit® Plus, SmartFit® 3D, SmartProfile®, EVOLVE SPC Offline software: ZONE3
Power Requirements	100 - 200 VAC or 200 - 240 VAC, 50/60 Hz, 1 phase, 1380 W	
Operating Environment, Safe Operation	15-30 °C	
Rated Environment	Temperature 18-22 °C, stable to ±1 °C; max rate of change 1 °C / hour; max vertical gradient of 1 °C / meter; 30-80% humidity; vibration <0.001g below 15 Hz	
XYZ Volumetric Accuracy	$E_3 = (2.8 + 5L/1000) \mu\text{m}$	$E_3 = (2.4 + 7L/1000) \mu\text{m}$ (requires optional high-performance package and 0.05 µm scale resolution)
XY Area Accuracy	$E_2 = (2.0 + 5L/1000) \mu\text{m}$	$E_2 = (1.4 + 6L/1000) \mu\text{m}$ (requires optional high-performance package and 0.05 µm scale resolution)
Z Linear Accuracy	$E_1 = (2.5 + 5L/1000) \mu\text{m}$	$E_1 = (1.5 + 5L/1000) \mu\text{m}$ (requires optional TeleStar Plus TTL laser, DRS laser, or touch probe)

*Patent Number 6,488,398 †Patent Number 7,791,731

Accuracy is evaluated with a QVI verification procedure where "L" is measured length in millimeters. Specifications apply within the rated environment. Standard optical specifications apply at the maximum optical magnification of the standard configuration. XY Accuracy applies with an evenly distributed load up to 10 kg in the standard measuring plane. The standard measuring plane is defined as a plane that is within 25 mm of the worktable surface. Depending on load distribution, accuracy at maximum payload may be less than standard. On-site verification of volumetric accuracy is optional.

†Lenses and lens attachments can be manually interchanged to change magnification and working distance.



Optical Gaging Products, a division of Quality Vision International
 850 Hudson Avenue • Rochester, NY 14621 • USA
 Phone: (585) 544-0400 • (800) 647-4243 • Fax: (585) 544-8092
 info@ogpnet.com
 www.ogpnet.com