

*Product
Portfolio*


PED



NACE



SIL2
Safety Integrity Level

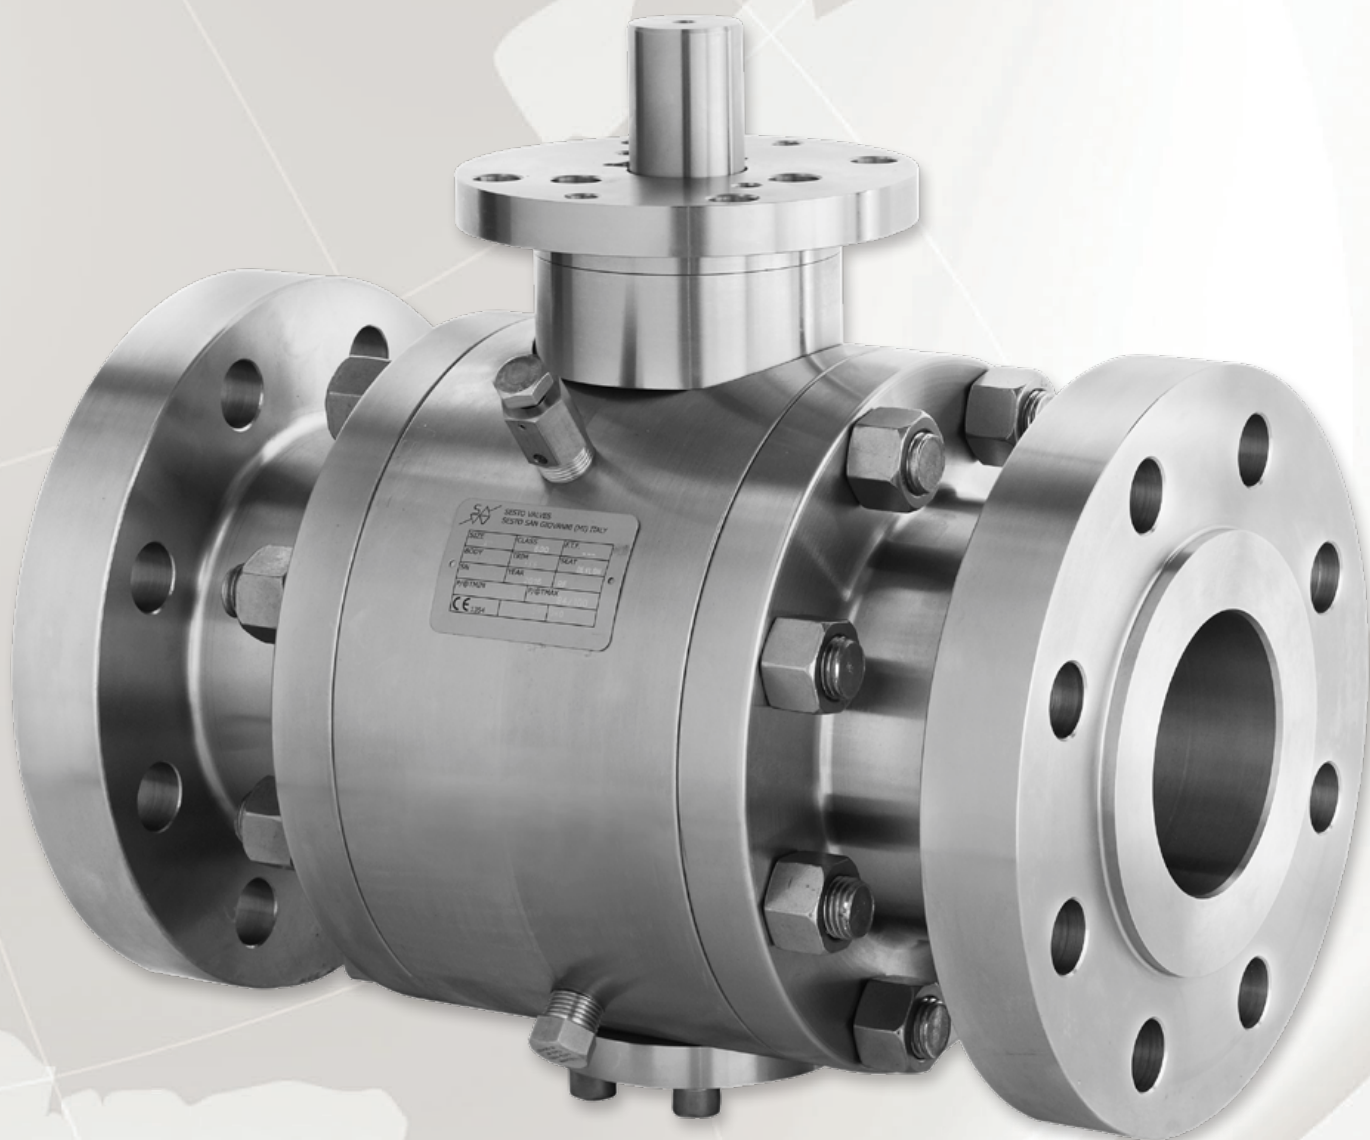


Worldwide Headquarters | Tel: +39.039.902.0888 - Fax: +39.039.902.0889
North American Headquarters | Tel: +1.636.856.8576 Fax: +1.636.856.8930
www.sestovalves.com | sales@sestovalves.com

Introduction

Sesto Valves specializes in custom designed ball valve solutions for the chemical, petrochemical and energy industries. Applications include cryogenics, extreme high temperatures, metal seated applications, as well as specialty double block and bleed emergency shutdown valve solutions. Headquartered in Agrate Brianza (MB) Italy, we are a premium ball valve manufacturer with over 30+ years of engineering experience. Our valves are 100% designed, manufactured, and tested in Italy with complete control of product quality and material traceability. We source only the best materials from local and global partners to ensure quality and competitive pricing.

Our philosophy is to make valves that fit your application, not the other way around. We match materials and trims to maximize performance and reliability, with ready access to special coatings and exotic or super alloys. Our engineers design valves to optimize fit and function, including special face-to-face, multiport or combination valves for cost and space savings. Our quality team inspects every component and runs extensive performance tests for design verification and production phases, and can also include your own customer specified testing. In order to provide a more complete solution, we partner directly with key valve automation industry leaders to provide actuation and automation controls in a comprehensive valve package. Contact Sesto Valves today with your most difficult valve application and we'll give you our best resources and expertise to help you reach your goals.

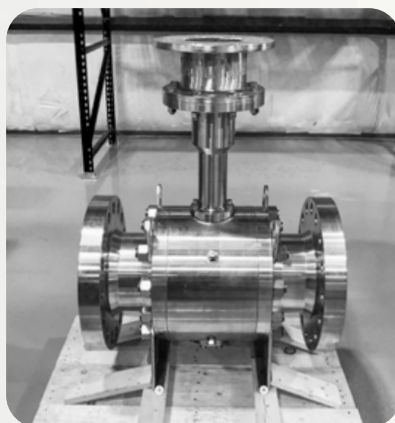

Europe

World Headquarters

Sesto SG, Italy

Via Socrate, 10
20864 Agrate Brianza (MB)
Italy
Tel: +39.039.902.0888
Fax: +39.039.902.0889



North America

Wentzville, Missouri

114 Resource Drive
Wentzville, MO 63385
United States
Tel: +1.636.856.8576
Fax: +1.636.856.8930

Materials

Body: Carbon Steel	A105N
Low Temp Carbon Steel	A350 GR LF2, LF3 A694 GR F42-F70
Martensitic Stainless Steel	A182 GR F6A, F6NM
Martensitic Precipitation	A564 GR 630 (17-4/PH)
Austenitic Stainless Steel	A182 GR F316, F316L, F321
Duplex & Super Duplex	A182 GR F51, F53, F55
Super Alloy, Precipitation	A638 GR 660 (iron base)
Nickel Chromium Alloy	Inconel® Alloy 625, 718 Incoloy® Alloy 825

Ball: LF2, F6, F304, F316, Duplex, Inconel®, Incoloy®, Monel

Stem: F6A, AISI 410, F304, F316, G630 17-4/PH, Duplex, Inconel, Monel

Seat Insert: PTFE, RPTFE Carbon, PCTFE (KEL-F), STFE, TFM, CTFM, Nylon, Nylon 6, Viton, PFA, Devlon, Delrin, PEEK, Metal

Hardware: B7/2H, L7/Gr.7, B8M/Gr. 8M, F51

Certifications and Compliance


Sesto Valves are designed and manufactured to internationally recognized standards including but not limited to the following:

Fire Testing: API 607, API 6FA, BS 6755 Part II

Testing: API 6A, API 598, API 17D, ISO 5208, BS 6755 Part I

Marking: API 6A, MSS-SP-25, PED

Certifications: API607, SIL, NACE, MR0175, PED, Fugitive Emissions

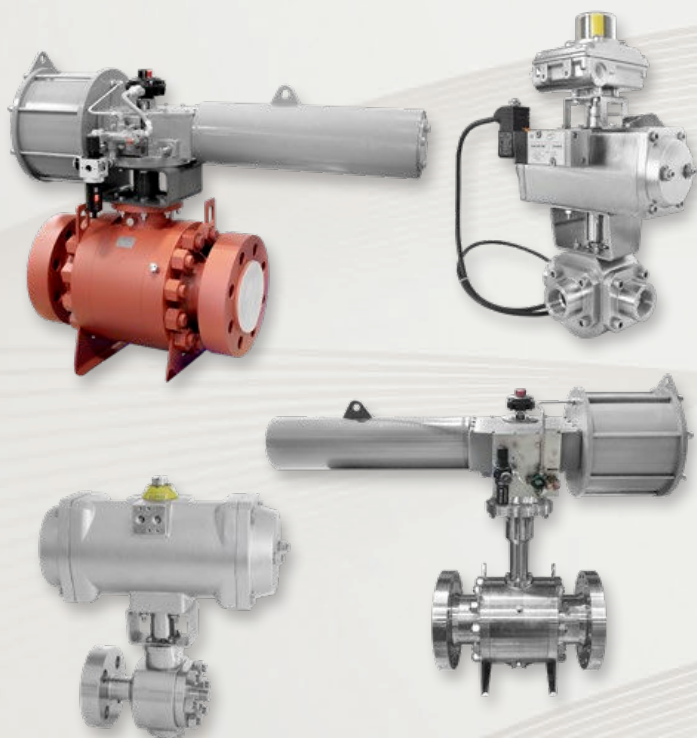

Design

Valve: API 6D/6A, ASME B16.34, ASME VIII, ASME B31.3, API 608

Ends: ASME B16.5, ASME B16.47, API 605, API 6A, ASME B16.25

Face-to-Face: API 6D, ASME B16.10, API 6A

Pressure: ASME B16.34

Temperature: ASME B16.34

Bleed: API 6D/6A, MSS SP-45

Anti-Static: BS 5351

Materials: ASTM, AISI, UNS, NACE MR 01 03

Fire: API 6FA, API 607, BS 6755 Part II

Testing: API 6D, ISO 5208, API 6A, BS 6755 PT 1, API 598, API 17D

Marking: MSS SP-25, API 6D/6A


Features and Benefits

- Class 150 to Class 2500
- Full and Reduced Bore
- Body Wall Thickness ASME B16.34, Forged or Cast Versions
- Face-to-Face Dimensions API 6D, ASME B16.10, HUB on Request
- Drain and Vent Body Configurations
- Emergency Sealant Injectors as Standard
- Blowout Proof, Low Torque Guided Stem Design
- Anti-Static Device and Live-Loaded Packing
- Wide Range of Soft Seat and Metal Seat Options
- Single or Double Piston Effect on Request
- Manual, Electric, Pneumatic, or Electro-Hydraulic Operators Available
- Custom Face-to-Face Lengths Available per Customer Requirement

Partial List of Service Applications

- General Service
- Ambient Low Temperatures (-46°C)
- Cryogenic (-196°C)
- High Temperature
- High Pressure
- Underground, Off-Shore
- Oil & Gas Transportation, Drilling, Distribution
- Gas Compression Processes
- Liquefied Natural Gas Handling and Transportation
- ESD Emergency Shut Down
- Sour Service

Testing per API Requirements

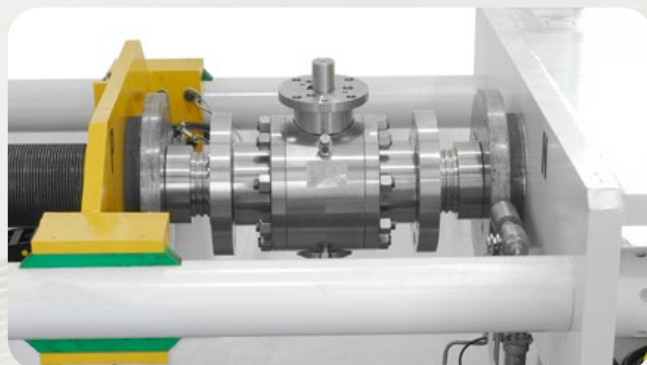

Product Scope


150# to 2500#
1/4" thru 8"



Floating Ball Valves

- Class 150 to Class 2500
- Size Range 1/4" thru 10" (Class Dependent)
- Full and Reduced Bore
- Body Wall Thickness ASME B16.34, Forged or Cast Versions
- End Connections: SW, BW, RF, RTJ, NPT, BSP, Special
- Fire-Safe Design API 607
- Blowout Proof, Low Torque Guided Stem Design
- Anti-Static Device and Live-Loaded Packing
- Fugitive Emissions ISO 15848
- Wide Range of Soft Seat and Metal Seat Options
- Manual, Electric, Pneumatic, or Electro-Hydraulic Operators Available
- Custom Face-to-Face Lengths Available per Customer Requirement


150# to 2500#
1/2" thru 36"

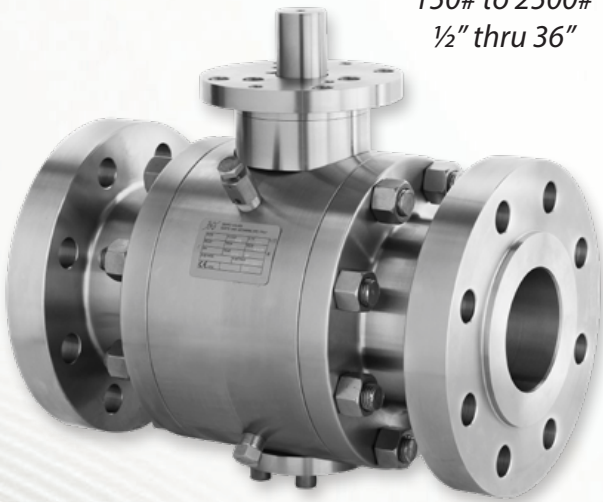

Trunnion Ball Valves

- Class 150 to Class 2500
- Size Range 1/2" thru 36" (Class Dependent)
- Full and Reduced Bore
- Body Wall Thickness ASME B16.34
- End Connections: RF, RTJ, BW, SW, NPT, BSP, Special
- Fugitive Emissions ISO 15848
- Fire-Safe Tested API 607
- Emergency Sealant Injectors Optional
- Anti-Static Device and Live-Loaded Packing
- Guided Seat Design
- Blowout Proof, Low Torque Guided Stem Design
- Wide Range of Soft and Metal Seated Options
- Manual, Electric, Pneumatic, or Electro-Hydraulic Operators Available
- Custom Face-to-Face Lengths Available


150# to 2500#
1/2" thru 12"

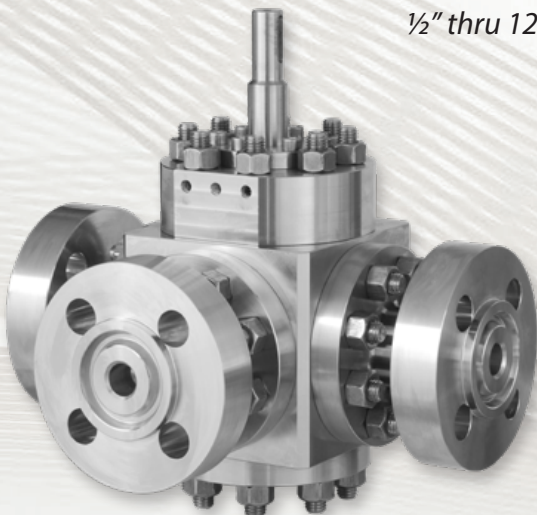

Multiport Ball Valves

- Class 150 to Class 2500
- Size Range 1/2" thru 12" (Class Dependent)
- Custom Sizes by Request
- 3-Way and 4-Way Configurations (T, L, Double L)
- 4-Seat Design, Universal Inlet/Outlet
- Floating Full and Reduced Bore
- Single Body Construction (No Top Flange)
- Fire-Safe Design API 607 Available
- Blowout Proof, Low Torque Guided Stem Design
- Anti-Static Device and Live-Loaded Packing
- Fugitive Emissions ISO 15848
- Wide Range of Soft Seat and Metal Seat Options
- A105N, LF2, LF3, Forged Body Options
- Special Materials Available Upon Request

150# to 2500#
1/4" thru 36"

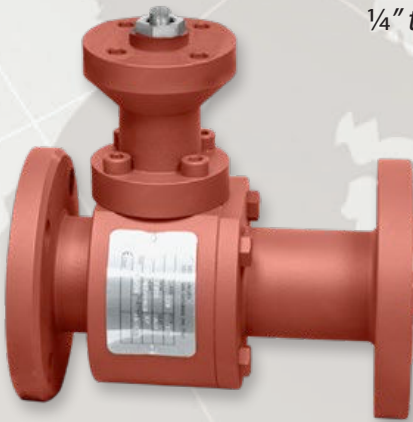

Severe Service

- Class 150 to Class 2500
- Size Range 1/4" thru 36" (Class Dependent)
- Metal Seated Class V and Class VI Shutoff
- Uni-Directional and Bi-Directional Service
- Floating and Trunnion, Full and Reduced Bore
- Body Wall Thickness ASME B16.34, Forged or Cast Versions
- Fire-Safe Design API 607
- Blowout Proof, Low Torque Guided Stem Design
- Live-Loaded Packing and Anti-Static Capable
- Fugitive Emissions ISO 15848
- Various Coatings and Materials Available
- Extended Bonnet/Stems Available
- Custom Designs Available per Customer Requirement


150# to 2500#
1/4" thru 18"



Block & Bleed

- Class 150 to Class 2500
- Size Range 1/4" thru 18" (Class Dependent)
- Single and Double Isolation, Multi-Port Designs Available
- Floating and Trunnion, Full and Reduced Bore
- Bolted Body Facilitates Inline Maintenance
- Venting Designs in Multiple Configurations
- Fire-Safe Design API 607
- Fugitive Emissions ISO 15848
- Wide Range of Soft Seat and Metal Seat Options
- Custom Face-to-Face Lengths Available per Customer Requirement

150# to 2500#
1/4" thru 24"

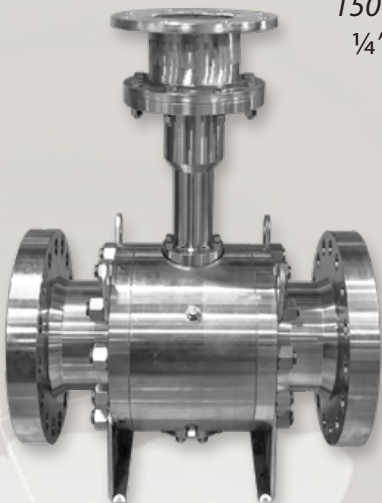


Cryogenic

- Class 150 to Class 2500
- Size Range 1/4" thru 24" (Class Dependent)
- Floating and Trunnion, Full and Reduced Bore
- Body Wall Thickness ASME B16.34, Forged or Cast Versions
- Cryogenic tested to -196°C (-320°F)
- Fire-Safe Design API 607
- Vented Ball Standard
- Blowout Proof, Low Torque Guided Stem Design
- Live-Loaded Packing and Anti-Static Capable
- Fugitive Emissions ISO 15848
- PTFE, TFM, CTFM, PCTFE (KEL-F®) and Metal Seats Available
- Valves are degreased, cleaned and packaged prior to shipping
- Custom Face-to-Face Lengths Available per Customer Requirement
- Manual, Electric, Pneumatic, or Electro-Hydraulic Operators Available

Custom Applications

ASTM B505 C95800
Nickel Aluminum Bronze



Block-Bleed-Block Vent Valve





Worldwide Headquarters
Via Socrate, 10, 20864 Agrate Brianza (MB) Italy
Tel: +39.039.902.0888 | Fax: +39.039.902.0889

North American Headquarters
114 Resource Drive Wentzville, MO 63385 USA
Tel: +1.636.856.8576 Fax: +1.636.856.8930

Web: www.sestovalves.com | Email: sales@sestovalves.com

Rev: Jan. 26, 2022